

DOCO




Renovation Door System

REN70 system

REN70 system

Doco International introduces a new Residential System; specifically designed for renovation projects with the vertical angle and lintel profile pre-finished in RAL 9010. The special designed lintel profile makes it possible to have a variable build in space (standard 70mm). Because of the innovative easy mount principle of the power unit, the door can be fitted by one person. You can therefore save time and money. The track sets are available in bolted and riveted versions. This renovation system is suitable for all 40mm panels. Available as pre-assembled sets or as separate components.

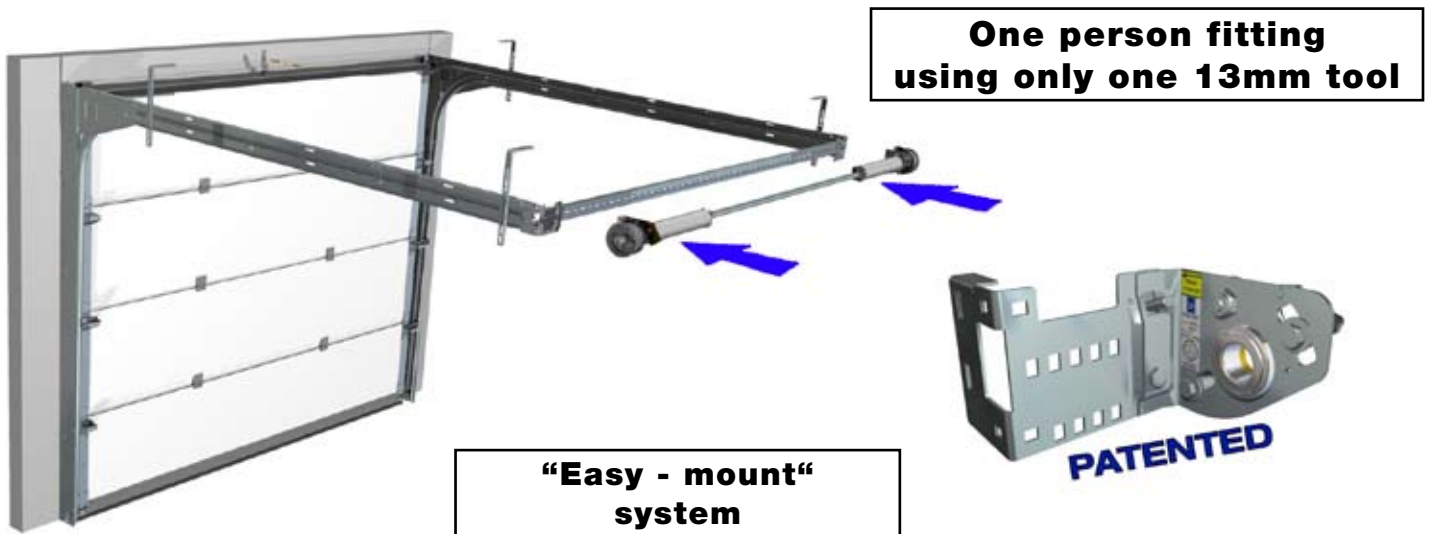

Technical information:

- Torsion spring system (rear);
- Seven standard heights available; 2000, 2125, 2250, 2375, 2500, 2750, 3000mm;
- Maximum door size: 5000 x 3000mm (w x h);
- Maximum door weight: 165 kg;
- Headroom, manual operation, at standard height: 70mm;
- Headroom with operator at standard height: 100mm;
- Minimum side room: 45mm (using 14024) (0mm with special covers, coming soon);
- CE designed conform 13241-1;
- ITT approved by SP;
- Vertical angle and Lintel profile pre-finished in RAL 9010;



60mm Pulley 25270

- For 3mm cable
- With holes for 43012 mounting



Top roller carrier 25003-L/R

- With 46mm roller

80mm Pulley 25271

- For 4mm cable
- With holes for 43012 mounting



DOCO-INFO

Additional REN70 components:



Spring break device 25650-L/R

- Certified for 60 Nm/spring
- SP certificate number P902383
- Universal design for 50mm and 67mm springs
- Fixed ratchet wheel on device
- Easy fitting (shape in shape)
- Easy assembly of power unit, easy mount system
- For use with 24619-L/R




Slideable C-track

Art. nr. Length (mm)

24810	1350
24811	3000
24812	1350
24813	3000


Notes:

- With holes
- With holes
- Without holes
- Without holes

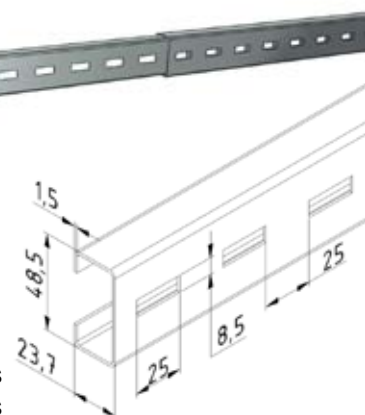

24820	3000
24821	4500
24822	6000
24823	3000
24824	4500
24825	6000

- With holes
- With holes
- With holes
- Without holes
- Without holes
- Without holes

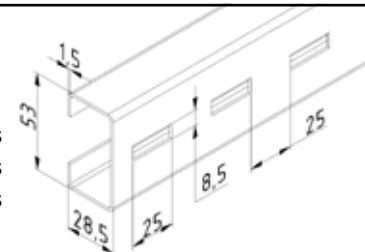

Rear bracket 24619-L/R

- Mounting possibility for extendable c-track
- Easy mounting support using 25650-L/R



Suspension profile 24805



Connection bracket 24801

- To use with 24803 and 24805



Bracket 24622

- Bracket for vertical angle reinforcement



Weather seal for lintel

Art. nr	Length
24750-2020	2020
24750-2145	2145
24750-2270	2270
24750-2395	2395
24750-2520	2520
24750-2770	2770
24750-3020	3020
24750-4000	4000
24750-5000	5000

Connection bracket 24623

- For lintel to vertical angle connection



Lintel profile

Art. nr	Length
23400-2500	2500
23400-3000	3000
23400-5000	5000
23400-6000	6000




Mounting bracket 24624

- For lintel profile connection

Renovation door system


Build-in spaces for REN70 system.

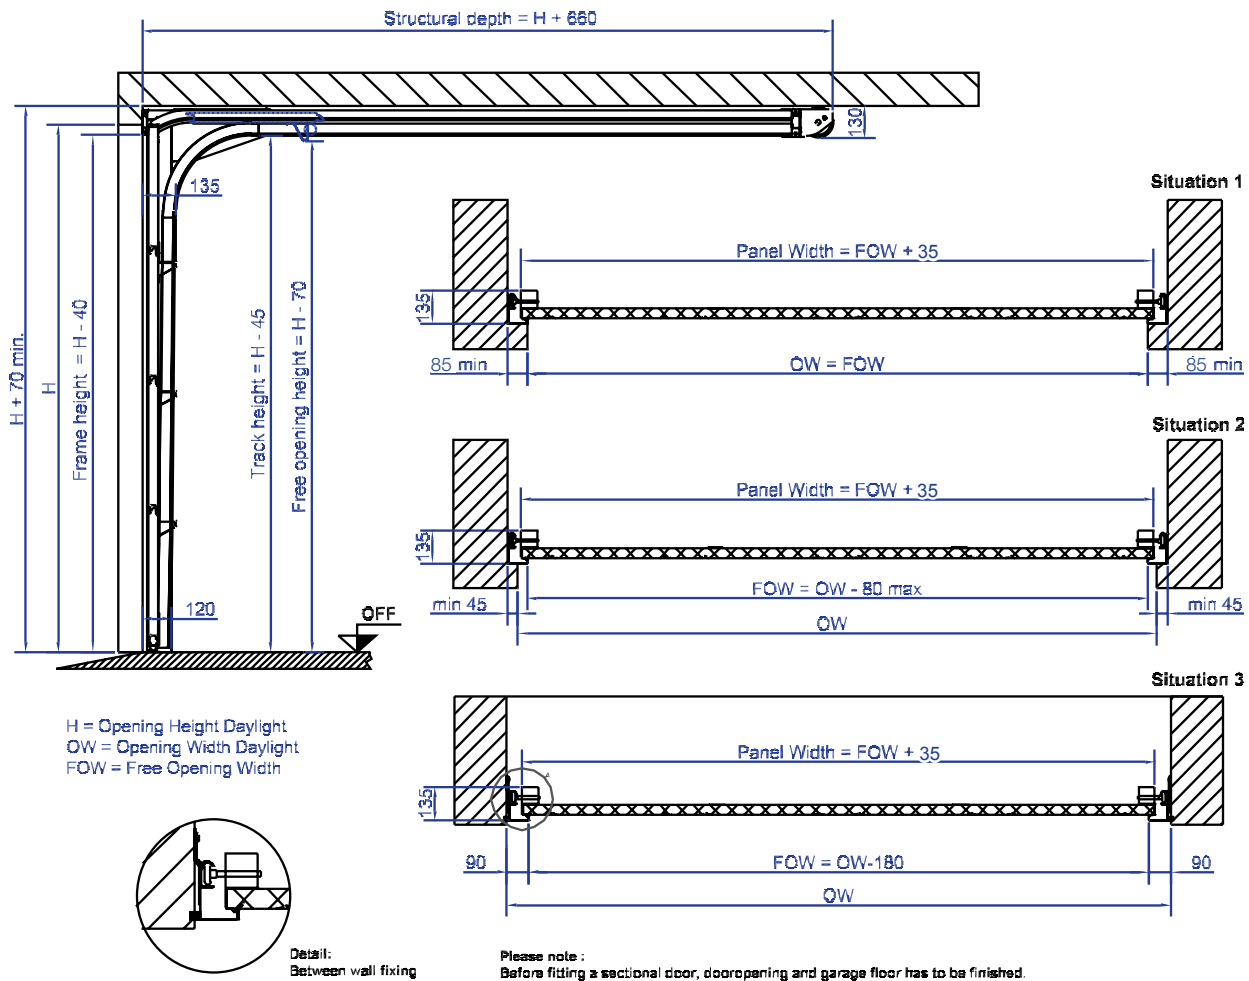

Pre-assembled trackset overview for REN70 system



Horizontal trackset REN 70 (Pair).



Curve section
REN 70 (Pair).

	Vertical trackset REN70 (Pair)		Horizontal trackset REN70 (Pair)		Curve section REN70 (pair)
	bolted version	rivet version	bolted version	rivet version	rivet version
Opening height (H)	article	article	article	article	article
2000	43000-2000	43010-2000	43001-2000	43011-2000	43012
2125	43000-2125	43010-2125	43001-2125	43011-2125	43012
2250	43000-2250	43010-2250	43001-2250	43011-2250	43012
2375	43000-2375	43010-2375	43001-2375	43011-2375	43012
2500	43000-2500	43010-2500	43001-2500	43011-2500	43012
2750	43000-2750	43010-2750	43001-2750	43011-2750	43012
3000	43000-3000	43010-3000	43001-3000	43011-3000	43012

Vertical trackset REN
70 (Pair).
Including weather
seal.



Doco International B.V.
Nusterweg 96
6136 KV Sittard
P.O. Box 427
6130 AK Sittard
The Netherlands
Tel: +31 (0) 464200666
Fax: +31 (0) 464526894

Doco International Limited
Unit 1 Northolt Trading Estate
Belvue Road
Northolt Middlesex
UB5 5QS
United Kingdom
Tel: +44 (0) 20 8839 8587
Fax: +44 (0) 20 8842 3661

Doco International
Southern Europe S.L.
P.I. Can Met Sidro
Avenida Generalitat, 55
08530 La Garriga / Barcelona
España / Spain
Tel: +34 9 3 861 28 25
Fax: +34 9 3 871 65 92

Doco International s.r.o.
Prostějov - Kralice na Hané
Háj 352
798 12 Kralice na Hané
Czech Republic
Tel: +420 582 360 100
Fax: +420 582 360 300